Excellent Cut and Abrasion Protection

TSG-400-R Series



Size	Cuff Color
XS	Red
Small	Yelllow
Medium	Green
Large	White
Extra large	Gray
2XL	Orange



ASTM F2992-15 2968-3024 grams Cut Level Range A5-A6

Based on third-party testing



D3884-09 2090 cycles Abrasion Level 3

Based on third-party testing

Description:

- 7 Gauge Knit Glove
- Armoren Engineered with Twaron®
- Heavy Weight
- Reinforced Thumb Crotch
- Seamless and Reversible
- 3" Cuff with Overcast Edge
- Ships within 1 5 days

Properties:

The TSG-400-R provides excellent dexterity for parts handling and the thumb crotch is reinforced with Twaron® for increased durability. It launders so well that it has been known to last more than 10 cycles, providing exceptional cost saving opportunities. The cuffs are color coded by size.

Recommended:

This glove targets work areas requiring high cut and abrasion protection such as glass, plastics, stamping, body weld, parts handling and generalpurpose activities. It has proven itself for years in the automotive industry and is our best seller.




To add excellent grip and heat dissipation, order this glove with high heat silicone dots on one side (TSG-400-R-SBD) or both sides (TSG-400-R-SBDD) making it reversible.



Good to Know!

TSG-400-R Series

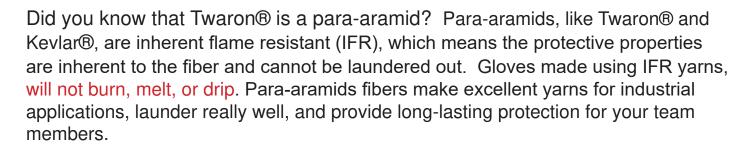



To Be Sure, Tri-Star uses Twaron® for its superior cut, abrasion, and thermal resistance.

Tri-Star uses only 100% virgin Twaron®, as recycled para-aramids could compromise the performance of the glove, and yarn could be inconsistent from shipment to shipment. For more information on Twaron, visit https://teijinaramid.com/en/products/

Laundry Instructions for Tri-Star gloves made using Armoren Engineered with Twaron®

- 1) Machine wash with commercial detergent using a water temperature between 150°F 160°F (50°C 70°). Dilute solution of bleach (solution of 5.25% sodium hypochlorite diluted at 1- 10 parts water) can be used as a sanitizer or cleaning agent if so desired.
- 2) Rinse with warm water.
- 3) Air-dry or tumble-dry at temperatures no greater than 160°F (70° C). If temperatures become too high, products such as gloves that fall and lie on the heated metal surfaces inside of the dryer can experience embrittlement due to the nature of synthetic polymers.
- 4) Steps 1 -2 can be repeated if necessary prior to drying.



For more information, please contact us! 800-832-7101